



INDUSTRY BENCHMARK SOLAR MODULES

As a global leader in PV energy, First Solar's advanced thin film solar modules have set the industry benchmark with over 8 gigawatts (GW) installed worldwide and a proven performance advantage over conventional crystalline silicon solar modules. Generating up to 8% more energy than competing modules with the same power rating, First Solar's Series 3 Black Plus™ PV Modules deliver superior performance and reliability to our customers.



PROVEN ENERGY YIELD ADVANTAGE

- Up to 8% more energy than conventional crystalline silicon solar modules with the same power
- Superior temperature coefficient (-0.29%/°C) resulting in greater energy yield in typical field operating temperatures
- Superior spectral response resulting in a proven energy yield advantage in humid environments



ADVANCED PERFORMANCE & RELIABILITY

- Improved long-term power-output and extended reliability test performance warranted for 25 years
- Independently tested to pass accelerated life and stress tests beyond industry standards
- Highly predictable energy in all climates and applications
- Independently certified for reliable performance in high temperature, high humidity, extreme desert and coastal environments




CERTIFICATIONS & TESTS

- Thresher Test, Long-Term Sequential Test, and PID-Free
- IEC 61646, IEC 61730, CE, Safety Class II @1000 V
- IEC 61701 Salt Mist Corrosion, IEC 60068-2-68 Dust and Sand Resistance
- ISO 9001:2008 and ISO 14001:2004
- UL 1703 and ULC 1703 Listed Class B Fire Rating (Class A Spread of Flame)
- CSI Eligible (CA-USA), FSEC (FL-USA), MCS (UK), CEC Listed (Australia)



MODULE WARRANTY⁴

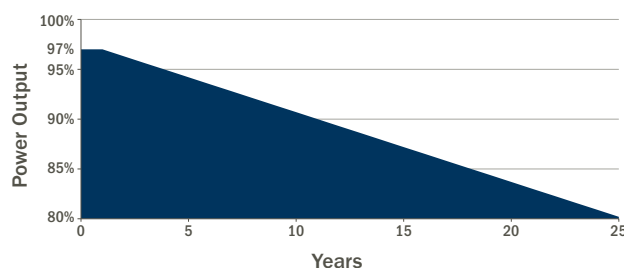

- 25-Year Linear Performance Warranty⁵
- 10-Year Limited Product Warranty

FIRST SOLAR SERIES 3 BLACK PLUS™ PV MODULE


MECHANICAL DESCRIPTION	
Length	1200mm
Width	600mm
Weight	12kg
Thickness	6.8mm
Area	0.72m ²
Leadwire	2.5mm ² or 4.0mm ² , 610mm
Connectors	MC4 ⁶
Bypass Diode	None
Cell Type	CdS/CdTe semiconductor, 146 active cells
Frame Material	None
Cover Type	3.2mm heat strengthened front glass laminated to 3.2mm tempered back glass
Encapsulation	Series 3 Black Laminate material with edge seal

MODULE NUMBERS AND RATINGS AT STC ^{1,2}						
NOMINAL VALUES		FS-390-PLUS	FS-392-PLUS	FS-395-PLUS	FS-397-PLUS	FS-3100-PLUS
Nominal Power (± 5%)	P _{MPP} (W)	90.0	92.5	95.0	97.5	100.0
Voltage at P _{MAX}	V _{MPP} (V)	44.4	45.2	45.8	46.3	46.8
Current at P _{MAX}	I _{MPP} (A)	2.03	2.05	2.08	2.11	2.14
Open Circuit Voltage	V _{OC} (V)	56.9	57.7	58.0	58.6	58.8
Short Circuit Current	I _{SC} (A)	2.27	2.28	2.29	2.29	2.33
Maximum System Voltage	V _{SYS} (V)	1000				
Limiting Reverse Current	I _R (A)	4.0				
Maximum Series Fuse	I _{CF} (A)	4.0				


MODULE NUMBERS AND RATINGS AT 800W/m ² , NOCT ³ 45°C, AM 1.5 ²						
Nominal Power (± 5%)	P _{MPP} (W)	67.8	69.7	71.6	73.5	75.4
Voltage at P _{MAX}	V _{MPP} (V)	41.4	42.2	42.7	43.2	43.7
Current at P _{MAX}	I _{MPP} (A)	1.64	1.65	1.68	1.70	1.73
Open Circuit Voltage	V _{OC} (V)	53.7	54.5	54.8	55.3	55.5
Short Circuit Current	I _{SC} (A)	1.83	1.84	1.85	1.85	1.88

TEMPERATURE CHARACTERISTICS		
Temperature Coefficient of P _{MPP}	T _K (P _{MPP})	-0.29%/°C
Temperature Coefficient of V _{OC}	T _K (V _{OC})	-0.28%/°C
Temperature Coefficient of I _{SC}	T _K (I _{SC})	+0.04%/°C

MECHANICAL DRAWING

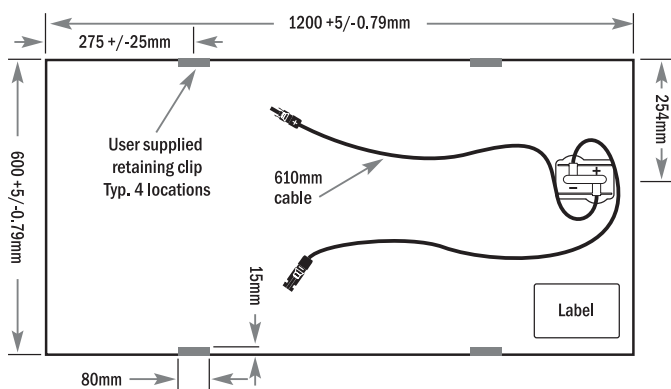

SUPERIOR TEMPERATURE COEFFICIENT

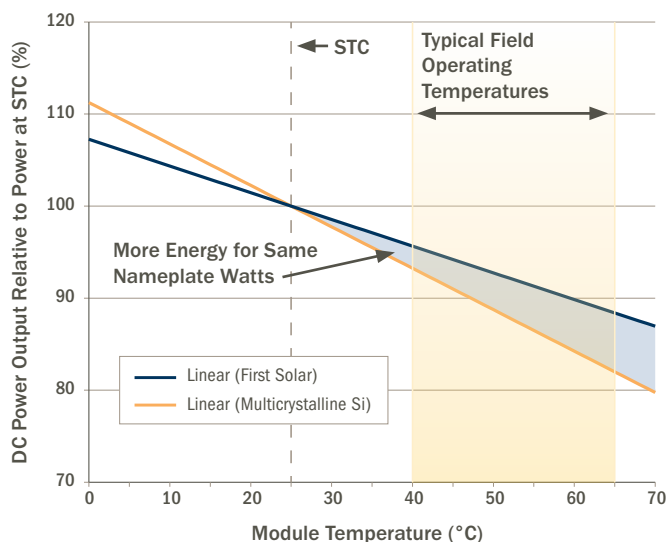

END-OF-LIFE RECYCLING

- Recycling services available through First Solar's industry-leading recycling program or customer-selected third party.

Disclaimer

The information included in this Module Datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this Module Datasheet. Please refer to the appropriate Module User Guide and Module Product Specification document for more detailed technical information regarding module performance, installation and use.

The First Solar logo, First Solar™, and all products denoted with ® are registered trademarks, and those denoted with a ™ are trademarks of First Solar, Inc.

- 1 Standard Test Conditions (STC) 1000W/m², AM 1.5, 25°C
- 2 All ratings ±10%, unless specified otherwise. Specifications are subject to change.
- 3 Nominal Operating Cell Temperature: Module operation temperature at 800W/m² irradiance, 20°C air temperature, 1m/s wind speed.
- 4 Limited power output and product warranties subject to warranty terms and conditions.
- 5 Ensures 97% rated power in first year, -0.7%/year through year 25.
- 6 Multi-Contact MC4 (PV-KST4/PV-KBT4)